

... CATALOG



a trademark of
VOSSCHEMIE

:: QUICKFINDER

→ A

Alu Spezial7

→ B

Booth Mask Stick9

BPO Hardener.....8

→ C

Car Grip4

Carbo Spray.....19

Carbo Spray Thinner.....19

Carbo UV Clear.....18

Cockpit-Spray.....13

→ D

Dry Coat- black11

Dualmatic.....9

Dust Keeper.....11

→ F

Flex7

Foam Tape10

→ G

Glas white5

→ K

KS-50.....14

KS-100.....14

KS-200.....14

KS-250.....15

KS-300.....15

KS-500.....15

KS-550.....16

KS-1000.....16

KS-1050.....16

KS-3000 Plus.....17

KS-4000.....17

KS-Dual Gun.....17

KS-Gun.....18

→ L

Liquid Putty.....6

→ M

Magnetic Flat Strip12

Magnetic Sanding Protection.....12

Master Tape Green10

Multi Glas Green5

Multi Green4

Multi Silver Light7

→ N

1K NC Putty6

→ P

Plastic Pro7

Plastic Spreader8

Polyester Spray.....14

Putty Board.....9

Putty Knife9

→ R

Refinish Restorer13

Rust Remover Spray.....13

→ S

Slim Tape10

Soft4

Speedmixer 3 Kg9

Spray6

Spray card12

1K Spray Primer.....8

Spray Thinner8

Steel.....5

→ T

Touch Up12

→ U

UV Clear application bottle18

UV Smart Lamp18

→ W

WR-Lifting Tape Premium10

→ Z

Zink Spray.....13

:: REGISTER

Product#	Product	Page	Product#	Product	Page
123.892	DUALMATIC 3 KG 32 EXV AV	9	142.889	CS Putty Board Set (10 pcs.)	9
124.315	CS SPRAY THINNER	8	143.496	CS Liquid Putty incl.hardener	6
125.580	CS Polyester Spray	8	144.808	CS GLAS WHITE incl.BPO white	5
126.020	CS Cockpit-SPRAY	13	146.191	Spray Card metal white	12
126.023	CS KS-1050 Karosserieschutz black	16	146.608	Spray Card metal dark grey	12
126.028	CS Rust Remover SPRAY	13	146.706	CS MULTI GREEN incl. hardener	4
126.029	KS-550	16	146.707	CS MULTI GLAS GREEN incl.hardener	5
126.030	CS Zink-SPRAY	13	148.019	CS CARBO SPRAY incl.MEKP-hardener	19
126.032	CS KS-100 Bitumenbasis brushable	14	148.234	CS CARBO SPRAY Thinner	19
126.034	CS KS-500 Bitumenbasis black	15	148.524	CS ALU SPEZIAL incl. hardener	7
126.040	CS KS - Dual Gun 1-2 UBS Gun	17	148.861	CS FOAM TAPE Classic 13MM KARTON (oval)	10
126.048	KS-Dual Gun cavity protection tube	17	149.221	CS MASTER TAPE GREEN 19mm x 50m	10
126.058	KLS Dual Gun suction pipes	17	149.225	CS MASTER TAPE GREEN 38mm x 50m	10
126.061	CS KS250 cavity protection ML incl. tube	15	149.226	CS MASTER TAPE GREEN 50mm x 50m	10
126.062	CS KS-200 cavity protection-ML	14	149.265	CS KS-1000 stone chip protection black	16
127.972	CS SOFT incl.hardener	4	149.338	CS Booth Mask Stick	11
127.978	CS SPRAY incl.hardener KG	6	149.342	CS DUST KEEPER	11
128.366	Dry Coat - black	11	149.613	CS Plastic Pro incl. Hardener	7
130.992	CS Magnetic Sanding Protection 4x55cm	12	150.769	CS TOUCH UP Bottle transp. 25 pcs.	12
132.116	CS Soft incl. hardener cartridge KG 2,6	4	150.801	CS KS-50 KA sealing compound brushable	14
132.413	BPO-HARDENER USA red Förster	8	151.071	CS Refinish Restorer	13
133.827	CS SLIM TAPE 18mm x 50m	10	151.504	CS WR-LIFTING TAPE PREMIUM 9+11mmx10 m	10
134.165	CS KS-300 cavity protection wax white-transp.	15	152.088	CS Multi Green long incl. hardener / Speedmixer	9
134.374	CS KS-4000 water based black	17	152.112	Carbo UV Clear	18
134.796	CS FLEX incl.hardener	7	152.194	Carbo UV Clear application bottle	18
135.396	CS KS-Gun	18	152.266	CS Nozzles Green / Speedmixer (a bag of 90 nozzles for each carton of 6)	9
137.214	CS Magnetic Flat Strip 4x55cm Set	12	152.719	CS Plastic Spreader 115x77mm Box á 100 pcs.	8
137.435	CS PUTTY KNIFE steel spreader 60mm	9	152.804	KS-3000 Plus HS stone chip protection grey	17
137.436	CS PUTTY KNIFE steel spreader 80mm	9	152.823	SPEEDMIXER 3 KG USA 10	9
137.437	CS PUTTY KNIFE steel spreader 100mm	9	153.432	Car Grip	4
138.587	CS STEEL incl.hardener	5	153.777	UV Smart Lampe	18
140.795	CS Multi Silver Light incl. hardener	7	154.093	1K NC putty	6
142.279	KS-Gun tube set	18			

Car Grip

Lightweight Performance Body Filler



→ **Area of application**

Use for Dents to Small Scratches with the same Product. Works on the most Automotive Substrates.

→ **Characteristics**

- Improves cycle time
- High Standard of quality
- No need for Body Filler & Putty, Car Grip is both in one

Art. No.	Specification	SP	MOQ
153.432	light blue / 8,82 lbs (4000g) tin (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1

Soft

polyester body putty



→ **Area of application**

For filling deep, uneven areas, particularly suitable for large areas.

→ **Characteristics**

Easily sandable, high viscosity, concentrated filling, pore-free surface.

Art. No.	Specification	SP	MOQ
127.972	beige / 3,97 lbs tin (incl. hardener)	1	6
132.116	beige / 5,73 lbs cartridge (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1

Multi Green

polyester multifunctional putty - green



→ **Area of application**

For universal use on all steel, aluminium and galvanised bodywork in car repairs as well as on GRP and wooden parts.

→ **Characteristics**

Multifunctional putty for a variety of surfaces.
This new multifunctional putty is a complete new developed putty with resins and fillers of the latest generation.
This high thixotropic putty is characterised by a high stability during application matched with a rapid drying time and a pore-free surface before sanding. VOC reduced.

Art. No.	Specification	SP	MOQ
146.706	green / 3.53 lbs (1.600 g) tin (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1

→ **Area of application**

Reinforced fibreglass putty for steel-, aluminium- and galvanised car bodies as well as for GRP and wooden elements.

→ **Characteristics**

This new fibreglass putty has not only a wide range of surface applications but also enhanced improvements in spreading behaviour, sandability and an even more pore-free surface as conventional fibreglass putties. VOC reduced.

Art. No.	Specification	SP	MOQ
146.707	green / 3.64 lbs (1.650 g) tin (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1

Multi Glas Green
polyester multifunctional fibreglass reinforced putty - green



→ **Area of application**

A fibreglass filler for repairing GRP components and for filling deeper uneven areas.

→ **Characteristics**

This white fibreglass putty has a direct adhesion on GRP components, steel and wood. The white neutral colour makes it versatile applicable on these various surfaces. It's modified fibre structure offers a better spreading behaviour and makes it easier to sand.

Art. No.	Specification	SP	MOQ
144.808	white / 3.97 lbs (1.800 g) tin (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1

Glas white
polyester fibreglass reinforced putty - white



→ **Area of application**

For filling bodywork edges, wing flanges and joints, as well as for repairs to tank supports and door edges.

→ **Characteristics**

Putty with a very high degree of hardness. Suitable for special repairs.

Art. No.	Specification	SP	MOQ
138.587	alu-grey / 1.98 lbs (900g) tin (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1

Steel
polyester body putty



For all our polyester body pastes:
If there is resin floating on top, please don't mix but throw it away.
Mixing causes air pockets in the paste and pinholes on the surface.

Liquid Putty

polyester finishing putty



→ Area of application

Liquid Putty is used for filling small surface imperfections like scratches and pinholes before applying the primer / filler. It can be used to fill up to approx. 3 mm deep imperfections.

→ Characteristics

Liquid Putty is a 2 component polyester finishing. Liquid Putty has been specially developed for the professional. It has excellent adhesion to metal, body filler, wood, fibreglass, catalysed primers and old / sanded OEM topcoats.

Art. No.	Specification	SP	MOQ
143.496	beige / 2.20 lbs (1.000 g) bottle (incl. hardener)	1	8
152.719	CS Plastic Spreader Box á 100 pcs.	1	1

1K NC Putty

kombi putty



→ Characteristics

The CS 1K NC Putty is 1-component nitrocellulose-based filler. The putty is ideal for spot repair of small unevenness, such as scratches, holes or stone damages. By application in thin layers, the filler dries very fast and forms a smooth surface. The 1K NC Putty is applicable on polyester fillers, acrylic fillers, metal, steel, aluminium and galvanized surfaces.

Art. No.	Specification	SP	MOQ
154.093	CS 1K NC Putty 7,05 oz. (200g)	1	24

Spray

polyester spray filler



→ Area of application

For filling uneven surfaces, sanding traces and pore bubbles on bodywork parts, both in the area of cars and lorries and also in vehicle construction and repair.

→ Characteristics

Spray is a 2 comp. polyester spray filler that is easy to sand. It has good adhesive properties to metal, wood, polyester puttied areas and GRP parts. It is for filling smaller and larger uneven areas. It dries up rapidly and produces a pore-free surface.

→ Processing equipment

All polyester products are porous and precautions should be taken to insure peak product performance. Once Spray is sanded, it must be topcoated immediately with a good quality 2K urethane primer such as CS Air Plus or 540 to properly seal the surface from moisture penetration.

→ Area of application

Gravity Spray Gun, jet size 2,5 diameter. Pressure: 2-2,5 bar.

Art. No.	Specification	SP	MOQ
127.978	grey / 3.31 lbs (1.500 g) tin (incl. hardener)	1	6

Plastic Pro

plastic putty

→ Area of application

To repair scratches and damages on plastic parts.

→ Characteristics

A specialized new developed plastic putty for the most common plastics available on the market. The putty has excellent properties such as adhesion, elasticity and sandability as well as fineness of the surface.

Art. No.	Specification	SP	MOQ
149.613	black / 2.20 lbs (1.000g) tin (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1



Flex

polyester contour putty for plastics

→ Area of application

For repairing small scratches and defects on plastic parts.

→ Characteristics

Plastic outline putty.

Art. No.	Specification	SP	MOQ
134.796	dark grey / 2.20 lbs (1.000) g tin (incl. hardener)	1	12
152.719	CS Plastic Spreader Box á 100 pcs.	1	1



Alu Spezial

aluminium & galvanized putty

→ Area of application

A special putty for working on aluminium surfaces.

→ Characteristics

Alu Spezial is a special polyester hard putty for aluminium surfaces. It has a lower temperature expansion with less shrinking at a very high degree of hardness. This flexible repair putty absorbs vibrations and oscillations better. It is suitable for all special repairs on aluminium. Besides it offers perfect adhesion on steel-, zinc- and aluminium bases.

Art. No.	Specification	SP	MOQ
148.524	lightgrey / 3.97 lbs (1.800 g) tin (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1



Multi Silver Light

polyester multifunctional putty

→ Area of application

For universal use as a filling and fine putty with excellent adhesion to all metallic surfaces, particularly aluminium and galvanized steel. Very lightweight (1.44g/ml) polyester multifunctional putty. Because of its thixotropic processing properties, suitable even for difficult areas.

Art. No.	Specification	SP	MOQ
140.795	silver / 3.31 lbs (1.500 g) tin (incl. hardener)	1	6
152.719	CS Plastic Spreader Box á 100 pcs.	1	1



BPO Hardener

BPO Hardener



→ **Area of application**
BPO hardener for polyester putty.

Art. No.	Specification	SP	MOQ
132.413	red / BPO hardener tube / 1,41 oz (40 g)	10	10

1K Spray Primer

spray filler



→ **Area of application**
Smooths shallow uneven spots and serves as a blocking primer on polyester putty.

→ **Characteristics**
Fast-drying acrylic filler with excellent adhesion and very high filling performance.

Art. No.	Specification	SP	MOQ
125.580	grey / 13.53 oz (400 ml)	1	12

Spray Thinner

spray putty thinner



→ **Description**
Thinner for polyester spray putty.

Art. No.	Specification	SP	MOQ
124.315	transparent / 33.81 oz (1 l) tin / spray putty thinner	1	6

Plastic Spreader

plastic spreader



→ **Characteristics**
Unbreakable and solvent-resistant plastic spreader, width 12 cm.

Art. No.	Specification	SP	MOQ
152.719	115 mm x 77 mm	100	100

→ **Area of application**

Precise measuring of polyester putty and hardener in order to ensure the correct mixing ratio. The amount of hardener to be added can be adjusted.

→ **Characteristics**

Mobile, handy device for 3 kg cartridges. Manual operation.

Art. No.	Specification	SP	MOQ
123.892	for 3 kg cartridges	1	1
132.116	Soft beige / 5,73 lbs cartridge (incl. hardener)	1	6
142.889	Putty Board 10 pcs. bag	1	1
152.719	CS Plastic Spreader Box á 100 pcs.	1	1

Dualmatic
putty dispenser - manual



→ **Area of application**

The Speedmixer produces a perfect ready mixed putty - homogenous and free of air bubbles.

→ **Characteristics**

For 3 kg cartridges.

Art. No.	Specification	SP	MOQ
152.823	Speedmixer 3 kg	1	1
152.088	Multi Green / slow / green / 5,56 lbs (2.523 kg) cartridge (incl. hardener) / Speedmixer	6	6
152.266	A bag of 90 nozzles for each carton of 6.	1	1
152.719	CS Plastic Spreader Box á 100 pcs.	1	1
142.889	Putty Board 10 pcs. bag	1	1

Speedmixer 3 kg
putty mixing dispenser



→ **Characteristics**

Steel spreader with a solvent-resistant plastic handle.

Art. No.	Specification	SP	MOQ
137.435	60 mm	1	12
137.436	80 mm	1	12
137.437	100 mm	1	12

Putty Knife
steel spreader



Slim Tape

special masking tape



→ Area of application

High-performance masking tape for problematic materials, such as rubber and plastic parts.

→ Characteristics

Extremely thin, flexible and waterproof. High curve resistance, hardly any paint edges, temperature resistant up to 100 °C.

Art. No.	Specification	SP	MOQ
133.827	18 mm x 50 m	10	160

Master Tape Green

masking tape



→ Area of application

Professional masking tape for paint shops.


→ Characteristics

Waterproof, temperature resistant up to 110°C.

Art. No.	Specification	SP	MOQ
149.221	19 mm x 50 m	48	48
149.225	38 mm x 50 m	24	24
149.226	50 mm x 50 m	24	24

WR-Lifting Tape Premium

masking tape - perforated

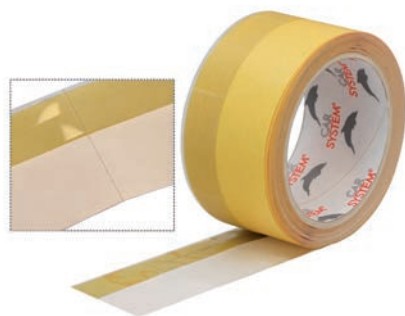

→ Description

Special masking tape for protecting rubber profiles on bonded wind-screens, as well as for covering headlamps, rear lights and direction indicators.

→ Characteristics

A masking tape which consists of a highly resistant, transparent, perforated plastics material strip.

Waterproof, temperature resistant up to 100°C. It offers two sizes in a band, 9 and 11 mm.

→ Processing equipment

For this masking tape a dispenser is not necessary because it is perforated.

Art. No.	Specification	SP	MOQ
151.504	perforated / 9 + 11 mm x 10 m	1	36

Foam Tape

foam sealing tape



→ Area of application

For professionally covering openings (doors, boot lids and engine bonnets). For perfectly sealing gaps and holes.

→ Characteristics

Silicone-free tape, temperature resistant up to 80 °C.

The rounded geometry ensures a very easy and universal application.

Art. No.	Specification	SP	MOQ
148.861	13 mm x 50 m	1	80

Dry Coat-black

- black

→ Area of application

Control powder for making imperfections in the surface visible while sanding.

→ Characteristics

The powder does not contain any solvents and does not clog the abrasive. The powder cartridge fits into the applicator.

Art. No.	Specification	SP	MOQ
128.366	black / set of: control powder pad + 2 x 30g refill	1	6



Booth Mask Stick

paint booth protection mask

→ Area of application

Booth Mask Stick is used as a protection against overspray in the paint booth. It protects booth walls and lighting systems as well.

→ Characteristics

A water-based, sprayable coating, drying to a transparent, tacky film. It does not affect the lighting in the booth.

→ Processing equipment

Gravity-fed spray gun for water-based paints.
Recommended nozzle size: 1.8-2.2 mm.

Art. No.	Specification	SP	MOQ
149.338	transparent / 1.32 gal (5 l)	1	4



Dust Keeper

floor dust binding agent

→ Area of application

Dust Keeper is used in the paint shop to improve the paint quality by reducing dust inside the spray booth. It is used on the booth floor and on the metal gratings.

→ Characteristics

A water based liquid that binds the dust in the spray booth.

→ Processing equipment

Pressurized atomizer.

Art. No.	Specification	SP	MOQ
149.342	transparent / 5.28 gal (20 l)	1	1



Spray card

color cards metal white and grey



→ Area of application

For control of color and opacity.

→ Characteristics

Can be used with solvent- and water based paints.

Art. No.	Specification	SP	MOQ
146.191	white / 200 pcs. / box	1	1
146.608	grey / 200 pcs. / box	1	1

Touch Up

bottle with brush - fillable 50 ml



→ Description

Bottle with brush for filling with coating.

→ Characteristics

Recloseable, transparent, unbreakable brush bottle with mixing shots and integrated brush for spot repairs such as stone chip damages or scratches on coated parts.

Suitable for solvent and water-based coatings.

Art. No.	Specification	SP	MOQ
150.769	transparent / 50 ml x 25 pcs	1	1

Magnetic Sanding Protection

edge protection



→ Area of application

Magnetic Sanding Protection is a plastic stripe with embedded magnetic discs. It is used for the protection of edges against unwanted sanding during the sanding-procedure of adjacent areas. Additionally it is used for fixing masking paper on car bodies without masking tape.

→ Characteristics

Set, 4 pcs. each.

Art. No.	Specification	SP	MOQ
130.992	4 x 55 cm	1	5

Magnetic Flat Strip

flat strip



→ Area of application

Magnetic Flat Strip is a plastic stripe with embedded magnetic discs to fix masking paper on car bodies without any masking tape. As the Magnetic Flat Strip is reusable very often, it is not necessary to use masking tape and therefore it saves a lot of costs in the paint-body-shop.

→ Characteristics

Set, 4 pcs. each.

Art. No.	Specification	SP	MOQ
137.214	4 x 55 cm	1	5

Cockpit-Spray

cleaning spray

→ Area of application

Cockpit Spray is used as a silicone free maintenance- and cleaning agent for all plastic and rubber surfaces inside the vehicle.

→ Characteristics

Cockpit Spray is designed for the care and cleaning of the dashboard, instruments, and plastic parts inside the car. This product does not contain any silicone, has an antistatic effect and brightens and refreshes colors. Cockpit Spray has a pleasant orange scent.

Art. No.	Specification	SP	MOQ
126.020	transparent / 13.53 oz (400 ml)	1	12



Refinish Restorer

plastic renewer

→ Area of application

Refinish Restorer is a high quality restorer for all kind of unpainted plastics, which were faded out by the sun. After processing Refinish Restorer on the plastic it will look quite like new again. Refinish Restorer is long-lasting and has a perfect finish. Refinish Restorer removes perfectly and effortlessly polish-splashes, -stains and -spots on plastic.

→ Characteristics

Refinish Restorer is a transparent liquid. It is very easy to apply on plastic surfaces, using any polishing cloth. It achieves excellent results on unpainted plastic surfaces. Refinish Restorer does not contain any silicone. For exterior use only.

→ Body Shop Safe

Do not apply to painted surfaces.

Art. No.	Specification	SP	MOQ
151.071	transparent / 33.81 oz (1 l)	1	6



Rust Remover Spray

rust remover

→ Area of application

Loosens jammed screws, nuts, door hinges, etc.

→ Characteristics

An oil that creeps underneath the rust, protecting the treated components against corrosion and mechanical abrasion.

Art. No.	Specification	SP	MOQ
126.028	brown / 7,10 oz (300 ml)	1	12



Zink-Spray

anticorrosive

→ Area of application

Zink-Spray is an anticorrosive aerosol for spot welding on inside panels in bodyworks.

→ Characteristics

Cold galvanising of metal substrates. Temperature resistant up to 490 °C according to DIN 50976, 53167, 50021, 53151.

Art. No.	Specification	SP	MOQ
126.030	grey / 20,29 oz (400 ml)	1	12



KS-50

seam sealer - brushable



→ Area of application

Karosserie-Dichtmasse is a waterproof sealer for joints, particularly processed on aftermarket carbody-parts and covering trim pieces. Karosserie-Dichtmasse is a brushable, durable, permanently elastic seam sealing for the front and rear spoiler, overlapping seams in the trunk, on the floor in the passenger compartment and on wheel arches etc.. Karosserie-Dichtmasse has an excellent adhesion to bare, primed or coated metal, is overpaintable and makes a replication of an authentic structure possible.

→ Characteristics

Karosserie-Dichtmasse is a permanently elastic, brushable seam sealer made of synthetic rubber, which is very quick-drying and heat / cold-resistant (-25° C to +80° C).

Art. No.	Specification	SP	MOQ
150.801	grey / 2.20 lbs (1 kg)	1	12

KS-100

underbody protection bitumen - brushable



→ Area of application

KS-100 is a long-term corrosion preventative for underbody treatment of all types of vehicles. It protects the underbody from rocks, road salt, etc..

→ Characteristics

KS-100 is a thixotropic, brushable underbody-protection made of a bitumen-resin mixture, that protects vehicle underbodies from corrosion and reduces road noise.

Art. No.	Specification	SP	MOQ
126.032	black / 33.81 oz (1 l)	1	12

KS-200

cavity protection



→ Area of application

KS-200 is designed to protect hollow cavities in vehicles from corrosion. It even flows into tight spaces and has a very good adhesion to metal.

→ Characteristics

KS-200 has a wax-like consistency that leaves an elastic film on the surface once the solvents are evaporated. KS-200 will provide reliable rust protection for several years and has a long-term protection on surfaces, which are in contact with aggressive liquids like salt-water.

Art. No.	Specification	SP	MOQ
126.062	brown-transparent / 33.81 oz (1 l)	1	12
135.396	Premium Spray Gun KS Dual Gun for underbody protection	1	1
142.279	sold separately: tube set / 0.95 m	1	1
126.040	incl. 2 additional suction pipes	1	1
126.058	sold separately: cavity protection tube / 0.9 m	1	1

KS-250

cavity protection ML

→ Area of application

KS-250 is designed to protect hollow cavities on vehicles from corrosion. It even flows into tight spaces and has a very good adhesion to metal. KS-250 has an excellent heat resistance and can be used on parts of the engine, as well. For renewing and retreating of existing protective coatings.

→ Characteristics

KS-250 has a hydrophobic and penetrating effect. Once the solvents are evaporated, KS-250 is slightly sticky and leaves a glazed wax-like film on the surface. KS-250 will provide a reliable rust protection for several years and has a long-term protection on surfaces, which are in contact with aggressive liquids like salt-water etc.. KS 250 has a high melting point of 160°C and has a no-dripping feature for an optimal use.

Art. No.	Specification	SP	MOQ
126.061	brown-transparent / 16.91 oz (500 ml)	1	12



KS-300

cavity protection wax

→ Area of application

KS-300 is designed to protect hollow cavities in vehicles from corrosion. It even flows into tight spaces and has a very good adhesion to metal. KS-300 has an excellent heat resistance and can therefore also be used on parts of the engine.

→ Characteristics

KS-300 has a hydrophobic and penetrating effect on the surface. Once the solvents are evaporated KS-300 is slightly sticky and leaves a glazed wax-like film on the surface. KS-300 will provide a reliable rust protection for several years and provides a long-term protection of surfaces, which are in contact with aggressive liquids like salt-water. KS 300 has a high melting point of 160°C.

Art. No.	Specification	SP	MOQ
134.165	white-transparent / 33.81 oz (1 l)	1	12
135.396	Premium Spray Gun KS Dual Gun for underbody protection	1	1
142.279	sold separately: tube set / 0.95 m	1	1
126.040	incl. 2 additional suction pipes	1	1
126.058	sold separately: cavity protection tube / 0.9 m	1	1



KS-500

underbody protection bitumen

→ Area of application

KS-500 is a bitumen protection for under-body treatment of all types of vehicles.

→ Characteristics

KS 500 provides long-term, bitumen-based under-body protection. KS-500 offers effective protection against stone chips and road salt. It reduces vibrations and road noise.

Art. No.	Specification	SP	MOQ
126.034	black / 33.81 oz (1 l)	1	12
135.396	Premium Spray Gun KS Dual Gun for underbody protection	1	1
142.279	sold separately: tube set / 0.95 m	1	1
126.040	incl. 2 additional suction pipes	1	1



KS-550

black undercoating-bitumen



→ Area of application

KS-550 is a car body bitumen protection for under-body treatment. Especially for renewing and retreating of existing protective coatings

→ Characteristics

KS 550 provides long-term, bitumen-based under-body protection. KS-550 offers effective protection from stone chips and road salt and reduces vibrations and road noise.

Art. No.	Specification	SP	MOQ
126.029	black / 16.91 oz (500 ml)	1	12

KS-1000

stone chip protection



→ Area of application

KS-1000 is a long-lasting stone chip protection for all car body panels. KS-1000 protects door sills, engine bonnets and the under-body against corrosion. It can also be used on PVC.

→ Characteristics

Once cured KS 1000 is resistant to oil, water, and road elements. Prior to topcoat KS 1000 must be primed with a good quality 2K urethane primer such as CS Air Plus or 540 or catalyzed non sanding sealer.

Art. No.	Specification	SP	MOQ
149.265	black / 33,81 oz (1 l)	1	12
135.396	Premium Spray Gun KS Dual Gun for underbody protection	1	1
142.279	sold separately: tube set / 0.95 m	1	1
126.040	incl. 2 additional suction pipes	1	1

KS-1050

stone chip protection spray



→ Area of application

KS-1050 is a long-lasting stone chip protection for all car body components. KS-1050 protects door sills, engine bonnets and under-bodies against corrosion. It can also be used on PVC.

→ Characteristics

KS-1050 is a high solid, asbestos-free stone chip protection. After drying, KS-1050 provides a permanent elastic, recoatable and textured surface. The temperature resistance (cured) of KS-1050 is from - 25°C to +80°C. It is resistant against oil, water and road salt water.

Art. No.	Specification	SP	MOQ
126.023	black / 16.91 oz (500 ml)	1	12

→ **Description**

The KS-3000 Plus is an overpaintable anti-stoneship protection of the latest generation. After drying the coating is overpaintable with most common paint systems. After the product has completely dried, a durable elastic film remains.

→ **Characteristics**

KS-3000 Plus has a very good adhesion to almost all surfaces and is resistant to extreme weather conditions, abrasion, splash water, impurities and salt.

Art. No.	Specification	SP	MOQ
152.804	grey / 33,81 oz (1 l)	1	12
135.396	Premium Spray Gun KS Dual Gun for underbody protection	1	1
142.279	sold separately: tube set / 0.95 m	1	1
126.040	incl. 2 additional suction pipes	1	1

KS-3000 Plus

HS stone chip protection



→ **Area of application**

KS-4000 is a long-lasting stone chip protection for all car body panels like spoilers and doors. KS-4000 protects door sills, engine bonnets and the under-body against corrosion. It can also be used on PVC.

→ **Characteristics**

KS-4000 is a water-based stone chip protection. It is a very high quality protection for under-body treatment and all types of car body panels. KS-4000 has a very good adhesion to all surfaces and is rapidly overpaintable with all kind of paint systems. KS-4000 is solvent-resistant. When applying 2 comp., base coat or water based lacquers the surface must be primed with CS Kunststoff-Haftvermittler-SPRAY ML400 and allowed to flash off/dry before painting.

Art. No.	Specification	SP	MOQ
134.374	black / 33,81 oz (1 l)	1	12
135.396	Premium Spray Gun KS Dual Gun for underbody protection	1	1
142.279	sold separately: tube set / 0.95 m	1	1
126.040	incl. 2 additional suction pipes	1	1

KS-4000

water-based stone chip protection



→ **Area of application**

KS Dual Gun can be used with all kind of stone-chip protection materials, under-body waxes and cavity protections, which are available in one litre tins.

→ **Characteristics**

KS Dual Gun is a special developed gun for usage of all kind of solvent based stone chip protection materials, under-body waxes and cavity protections. The rapid action coupling makes a fast change between different products very easy.

→ **Processing equipment**

- Air consumption 200 - 250 l/min ; 1,7 – 2,1 cfm
- Max. pressure 10-12 bar ; 135- 162 psi
- Work pressure 3,5 - 4,5 bar 45 – 60 psi
- Thread for air-inlet 1/4 - inner thread

Art. No.	Specification	SP	MOQ
126.040	incl. 2 additional suction pipes	1	1
126.058	sold separately: cavity protection tube / 0.9 m	1	1
126.048	sold separately: suction pipes	1	1

KS-Dual Gun

gun for underbody protection



KS - Gun

gun for underbody protection



→ Area of application

KS – Gun rebuilds the original structure of under-body and stone chip protection. The material- and air supply of the KS- Gun are adjustable. It is not necessary to clean the gun after use because the material inside of the gun does not dry up when the material needle is closed to the maximum.

→ Characteristics

- Safety valve for usage of 1 litre tins:
- pressure max.: 10-12 bar /135 – 162 psi
- optimal working pressure: 2 – 4 bar / 27 - 54 psi
- air consumption: 130-250 l/min. / 1,53 – 2,95 cfm

Art. No.	Specification	SP	MOQ
135.396	gun for underbody protection	1	1
142.279	sold separately: tube set / 0.95 m	1	1

UV Smart Lamp

cavity protection ML



→ Area of application

The Carsystem UV Smart Lamp is an UV hand lamp which is perfectly suited for drying UV products. Due to the adjustable magnetic foot you can use the accumulated UV lamp even on vertical application areas. Through the hook it is easy to hang up the lamp wherever possible.

Art. No.	Specification	SP	MOQ
153.777	UV Smart Lamp	1	12

Carbo UV Clear

transparent UV clear coat



→ Area of application

Using this new CS CARBO UV Clear clear coat small holes / pores can be repaired easily at CFRP visible components.
CAUTION – In edge building CS CARBO UV Clear is of limited suitability, since the product has an insufficient adhesion. Therefore the clear coat is only punctual applicable.

→ Characteristics

CS CARBO UV Clear is a VOC-compliant, UV drying clearcoat.

Art. No.	Specification	SP	MOQ
152.112	transparent / CARBON UV Clear / 16,9 oz. (500 ml)	1	6
152.194	plastic bottle 1,69 oz. (50 ml) incl. application tip	1	1

→ **Area of application**
Thinner for Carbo Spray.

Art. No.	Specification	SP	MOQ
148.234	transparent / 1.98 lbs (900 g) tin	1	6

Carbo Spray Thinner

thinner



→ **Area of application**
For filling uneven surfaces (pinholes, sanding marks, concavities).

- **Characteristics**
Carbo Spray is a transparent filler for carbon parts.
- Easy sandable
 - Adhesion on carbon grounds
(Polyester/Epoxy - carry out a test beforehand)
 - Adhesion on polyester filler
 - Adhesion on GRP parts
 - For filling small or deeper imperfections
 - Very rapid hardening
 - Pinhole-free surface
 - Transparent
 - UV-resistant - no yellowing

Art. No.	Specification	SP	MOQ
148.019	transparent / 1.81 lbs (820g) tin (incl. hardener)	1	6

Carbo Spray

transparent filler for carbon parts





a trademark of
VOSSCHEMIE

CRC Line Inc.
USA/Canada Distribution Partner
120 A Goddard Memorial Drive
Worcester, Massachusetts 01603

Phone: +1 508-757-3955
Web: www.carsystem-usa.com

Version 0817